
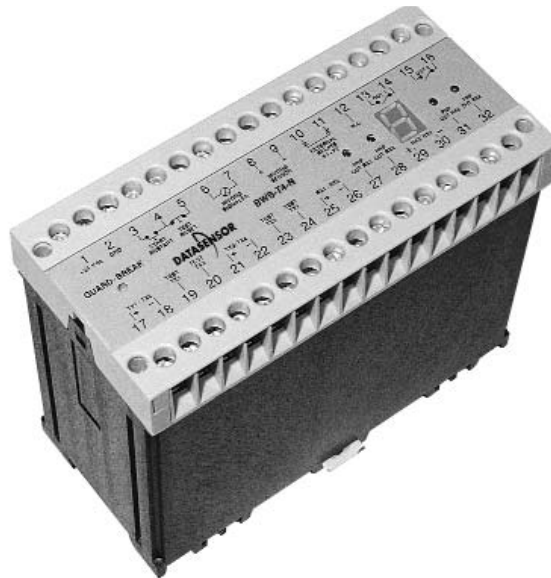


## TYPE 4 SAFETY CONTROL UNITS



- *Functioning with up to 4 emitter-receiver photoelectric sensors*
- *Device for body protection and access control*
- *Versions with 'Muting', double 'Muting' and 'Override' functions*
- *Double safety relay output*

## SB-BWS-T4 SERIES

The control units of the **SB-BWS-T4** series are suitable for type 4 safety systems and can be connected with up to four emitter-receiver photoelectric sensors, available in the tubular M18 format, either in the plastic S5-F/G-ST4 or metal S10-F/G-ST4 versions for distances reaching 8 m, in the M18 tubular plastic SL5-F/G-ST4 model with class 1 laser emission for distances reaching 40 m or in the parallelepiped S30-F/G-ST4 model reaching 50 m.



The couples of photoelectric sensors are controlled in sequence in order to avoid interferences; at any interruption of sensors beam, the contacts of the two relay outputs open causing the safety block of the controlled machinery. The autodiagnostic is continuous and the reset is automatic or manual selectable.

The versions with 'muting' and 'override' offer the possibility to set, by means of the internal dip-switches, the photoelectric sensors to deactivate during material passage. The dip-switches can be easily reached through a side slot.




The **BWS-T4N-MT** model presents the 'double muting' function that, using one single control unit, allows the control of two dangerous areas with independent mutings.

The display and a red/green bicolour LED indicates the operating status of the control unit; other 4 green LEDs signal the correct sensors' alignment.

## TECHNICAL DATA

<b>Power supply:</b> .....	24 Vdc $\pm$ 10%, reverse polarity protection
<b>Consumption:</b> .....	420 mA max.
<b>Inputs for photocells:</b> .....	from 1 to 4 couples of emitter-receiver safety photoelectric sensors (S5-F/G-ST4, S10-F/G-ST4, SL5-F/G-ST4, S30-F/G-ST4 series)
<b>Operating distance:</b> .....	0 ... 8 m with S5-F/G-ST4 or S10-F/G-ST4 0 ... 40 m with SL5-F/G-ST4, 0 ... 50 m with S30-F/G-ST4
<b>Inputs:</b> .....	Start/Restart - NO, Test/Reset - NC Muting - NO, Ext. Relays - NC
<b>Indicators:</b> .....	1 digit display with 7 status indications and 9 error indications green/red free/interrupted beam LED 4 green photocell alignment LEDs external Muting lamp 24Vdc (300 mA)
<b>Output type:</b> .....	2 safety relay outputs with NO contact
<b>Output current:</b> .....	3.15 A max. (250 Vac)
<b>Response time:</b> .....	30 ms max.
<b>Auxiliary functions:</b> .....	Muting and Override configurable for each couple of photoelectric sensors, selectable automatic or manual reset
<b>Connection:</b> .....	terminal block with 32 screw contacts
<b>Mounting:</b> .....	DIN rail
<b>Safety category:</b> .....	type 4
<b>Electrical protection:</b> .....	class 2
<b>Mechanical protection:</b> .....	IP20
<b>Housing material:</b> .....	plastic
<b>Weight:</b> .....	500 g max.
<b>Operating temperature:</b> .....	-10 ... +55 °C
<b>Storage temperature:</b> .....	-20 ... +65 °C
<b>Reference standard:</b> .....	EN 954-1, EN 61496-1, EN 61496-2
<b>Certifications:</b> .....	 


## DETECTION DIAGRAMS WITH Sx-F/G-ST PHOTOELECTRIC SENSORS

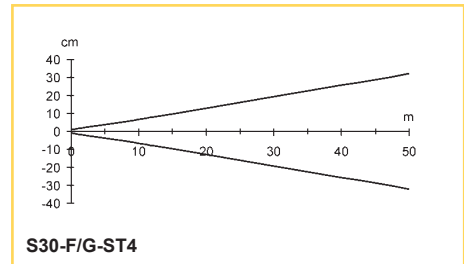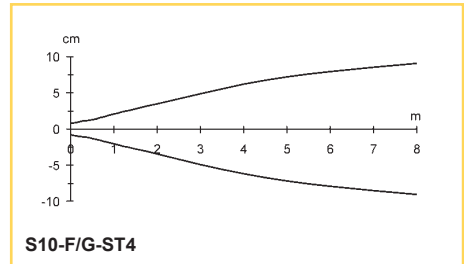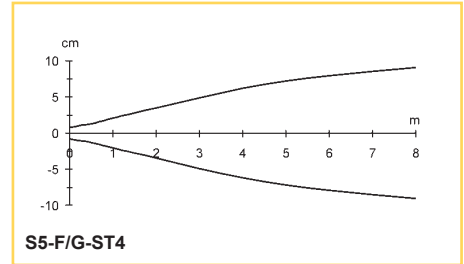


*Effective aperture angle (EAA)*

*For further information please refer to safety photoelectric sensors (Sx-F/G-ST series)*

## CONNECTIONS

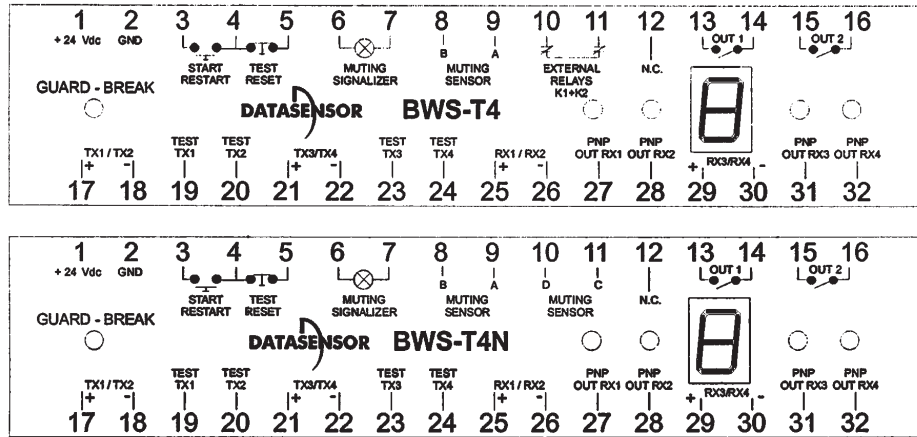

## DIMENSIONS

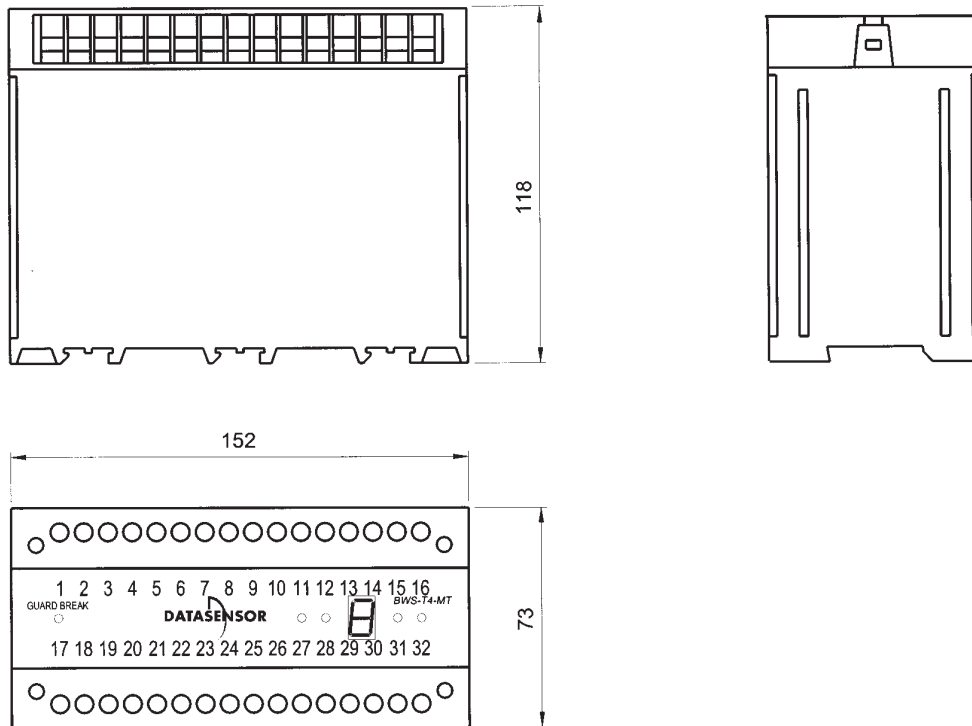

mm



## MODELS

MODEL	DESCRIPTION	CODE N°
BWS-T4-N	type 4 control unit	970500030
BWS-T4-N-MT	type 4 control unit with double Muting	970500040
BWS-T4-MT	type 4 control unit with external contacts control	970500020

## ACCESSORIES

MODEL	DESCRIPTION	CODE N°
GMC-6007	deviating mirror	M2056007
LMS	muting signalling lamp	M2059004

*Please refer also to **Sx-F/G-ST** safety photoelectric sensor series*

SAFETY DEVICES

**Distributed by:**

### HEADQUARTERS

#### DATASENSOR SpA

via Lavino, 265 - 40050 Monte San Pietro, BO - Italy

Tel. +39 051/6765611 • Fax +39 051/6759324

[www.datasensor.com](http://www.datasensor.com) • e-mail [info@datasensor.com](mailto:info@datasensor.com)

Datasensor SpA endeavours to continuously improve and renew its products; for this reason the technical data and contents of this catalogue may undergo variations without prior notice. For correct installation and use Datasensor SpA can guarantee only the data indicated in the instruction manual supplied with the products.